


# Flag Poles

**D** Base diameter: **Ø148**

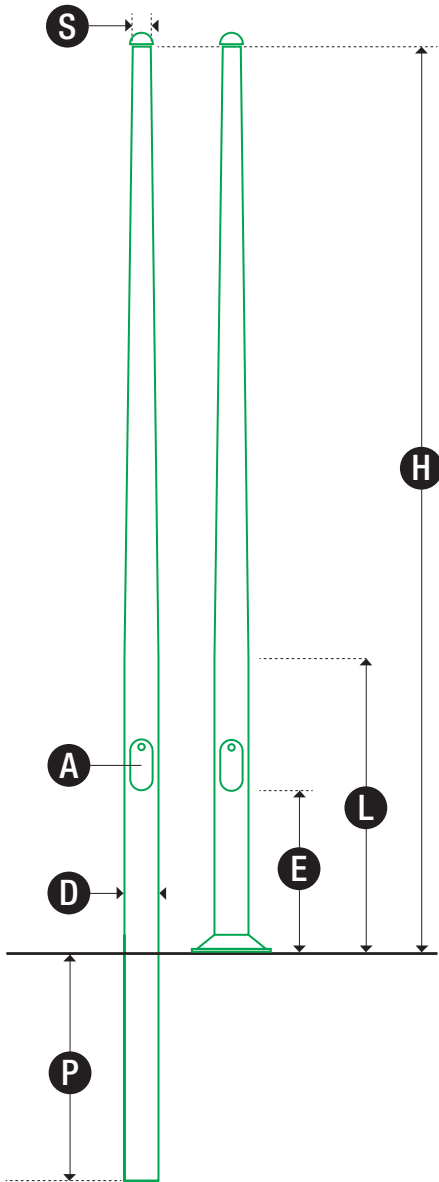

## Description:

Base diameter: Ø148  
 Spigot diameter: Ø60 or Ø76  
 Height range: 6 to 8 m  
 Pole material: Aluminium 6063-T6  
 Reinforced column: Aluminium 6063-T6

Designed per requirements of EN40 standards.

*\* Due to the topography differences per region, kindly get in touch with us with the details of the location to provide you with an accurate static report.*

**S** Spigot diameter: **Ø60**

<b>H</b>	FLANGED				PLANTED				
	Pole Height*[m]	Pole Code	Weight* [kg]	Straight Length [m]	Flange Code**	Pole Code	Weight* [kg]	Straight Length [m]	Planting Depth [m]
6			24,4	1,8	F0603B	PABF.D148	24,5	1,8	1,0
7	PAFF.D148	28,8	1,8	F0702B	27		1,8	1,0	
8		30,3	1,8	F0702B	30,3		1,8	1,2	


**S** Spigot diameter: **Ø76**

<b>H</b>	FLANGED				PLANTED				
	Pole Height*[m]	Pole Code	Weight* [kg]	Straight Length [m]	Flange Code**	Pole Code	Weight* [kg]	Straight Length [m]	Planting Depth [m]
6			25,3	1,8	F0603B	PABF.D148	25,3	1,8	1,0
7	PAFF.D148	27,8	1,8	F0702B	28		1,8	1,0	
8		31,5	1,8	F0702B	31,5		1,8	1,2	

*\* Total weight of unpainted pole with the given flange (FOXXB) without additional accessories.  
 \*\* Refer to page 86-87 for flange and anchorage details.*

- T** Wall thickness [mm]: 3
- A** Access door [mm]: 200\*120
- E** Opening position [mm]: 750

**F0603B**



**F0702B**

